



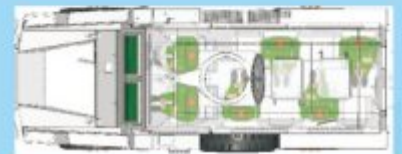

PUMA M26-15

4 X 4 Mine Protected Vehicle

- ◆ Robust, reliable and proven drive line
- ◆ Excellent 4 x 4 rough terrain mobility
- ◆ Low life cycle costs
- ◆ Multi role capability

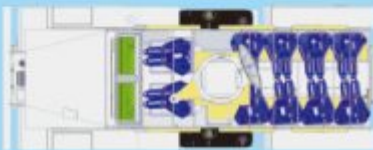

BASIC SPECIFICATIONS

PUMA M26-15 4X4 MINE PROTECTED VEHICLE



ENGINE

Type	Cummins B5.9-155-30
Configuration	6 Cyl in line turbo
Displacement	5883 cc
Max power	115 kW (155 hp) @ 2500 rpm.
Max Torque	590 Nm @ 1500 rpm
Fuel Type	Diesel

TRANSMISSION

Type	Tata G600 synchromesh
No of gears	6 Forward, 1 Reverse

TRANSFER CASE

Type	2-Speed selectable 4x4
------	------------------------

STEERING

Type	Hydraulic power assisted
Right Hand Drive configuration	Left Hand Drive optional

BRAKES

Service brakes	Dual air system
Park brake	Spring operated on both axles
Auxiliary brake	Engine exhaust brake

SUSPENSION

Springs	Semi elliptic leaf springs
Shock absorbers	Double acting telescopic hydraulic

WHEELS AND TYRES

Rims & tyres	Rims: 8.00 x 20 Tyres: 12.00 x 20 - 18 Ply Rating
--------------	---

CONFIGURATION

Crew seating:	10 (APC)
Variants	APC, tactical command, patrol vehicle (6 crew)
Entrance doors	One main rear door plus 2 side doors in drivers compartment

STANDARD FITMENT

Air conditioner	Yes
Defence ports	9 in crew compartment + 2 in drivers compartment
Seat belts	Fitted to all seats

ELECTRICAL SYSTEM

	24 Volt
--	---------

DIMENSIONS

Overall length	5810mm
Overall width	2265mm
Overhaul height	2710mm
Ground clearance (min)	300mm
Turning radius	7.9m wall-to-wall
Fuel capacity	200 litres

VEHICLE MASS

Tare	7200 kg
Gross vehicle mass (GVM)	8130 kg
Payload	930 kg

PERFORMANCE

Max speed	100 km/h
Sustained road speed	80 km/h
Fuel autonomy	> 800 km on roads
Max gradient	60%

BALLISTIC PROTECTION

	Front, rear and sides: STANAG; Roof B4+
--	---



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

P.O.Box 1126, Hatfield, 0028, Republic of South Africa
Tel: +27 (12) 802 1200/1/2/3 Fax: +27 (12) 802 1199
E-mail: armour@ott.co.za Website: www.ott.co.za

PUMA M26-15 ISS.3/2011